

09/807387

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC

2100 PENNSYLVANIA AVENUE, N.W.
 WASHINGTON, DC 20037-3213
 TELEPHONE (202) 293-7060
 FACSIMILE (202) 293-7860
 www.sughrue.com

JC17 Rec'd PCT/PTO 12 APR 2001

April 12, 2001

BOX PCT

Commissioner for Patents
 Washington, D.C. 20231

PCT/FR99/02382
 -filed October 6, 1999

Re: Application of **Francois DUBARRE, Gerard VEUTIN, and Eugene SOIRFECK**

METHOD AND DEVICE FOR CONTINUOUSLY COATING A METAL STRIP WITH A POLYMER COMPOSITION

Our Ref: Q64043

Dear Sir:

The following documents and fees are submitted herewith in connection with the above application for the purpose of entering the National stage under 35 U.S.C. § 371 and in accordance with Chapter II of the Patent Cooperation Treaty:

- ☐ an executed Declaration and Power of Attorney.
- ☒ an English translation of the International Application.
- ☒ 6 sheet(s) of drawings.
- ☐ an English translation of Article 19 claim amendments.
- ☐ an English translation of Article 34 amendments (annexes to the IPER).
- ☐ an executed Assignment and PTO 1595 form.
- ☐ a Form PTO-1449 listing the ISR references, and a complete copy of each reference.
- ☒ a Preliminary Amendment

The Declaration and Power of Attorney, and Assignment with PTO Form 1595 will be submitted at a later date.

It is assumed that copies of the International Application, the International Search Report, and copies of references cited within, the International Preliminary Examination Report, and any Articles 19 and 34 amendments as required by § 371(c) will be supplied directly by the International Bureau, but if further copies are needed, the undersigned can easily provide them upon request.

The Government filing fee is calculated as follows:

Total claims	<u>30</u>	-	<u>20</u>	=	<u>10</u>	x	\$18.00	=	<u>\$180.00</u>
Independent claims	<u>2</u>	-	<u>3</u>	=		x	\$80.00	=	<u>\$0.00</u>
Base Fee									<u>\$860.00</u>

TOTAL FEE

\$1,040.00

A check for the statutory filing fee of \$1,040.00 is attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880.

09/807387

JC03 Rec'd PCT/PAU 12 APR 2001


SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC

Q64043 Entering National Stage Under 35 U.S.C. § 371
April 12, 2001
Page 2

The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16, 1.17 and 1.492 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from October 14, 1998 based on French Application No. 9812866.

Respectfully submitted,

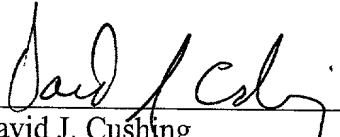
David J. Cushing
Registration No. 28,703

SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3213
Telephone: (202) 293-7060
Facsimile: (202) 293-7860

Date: April 12, 2001

09/807387

09/807387

JCO3 Rec'd PCT/PVO

12 APR 2001

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Francois DUBARRE, et al.

Attorney Docket Q64043

Appln. No.: not yet assigned

Group Art Unit: not yet assigned

Confirmation No.: not yet assigned

Examiner: not yet assigned

Filed: April 12, 2001

For: METHOD AND DEVICE FOR CONTINUOUSLY COATING A METAL STRIP WITH
A POLYMER COMPOSITION

PRELIMINARY AMENDMENT

Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination, please amend the above-identified application as follows:

IN THE SPECIFICATION:

The specification is changed as follows:

Page 1, after the title, insert the heading

BACKGROUND OF THE INVENTION

Page 4, after line 12, insert the heading

SUMMARY OF THE INVENTION

Page 5, after line 36, insert the heading

BRIEF DESCRIPTION OF THE DRAWINGS

Page 6, after line 31, insert the heading

DETAILED DESCRIPTION OF THE INVENTION

09/807387-062901

IN THE CLAIMS:

Please enter the following amended claims:

3. (Amended) A method according to claim 1, characterized in that said coated metal strip B is post-heated after it is fed over said support roller (1”).

4. (Amended) A method according to claim 1, characterized in that said polymer composition P is applied by rolling said composition between an applicator roller (2”) with a deformable surface and said strip B bearing on said support roller (1”).

5. (Amended) A method according to claim 1, characterized in that said polymer composition is applied in the solid state in the form of a film.

6. (Amended) A method according to claim 1, characterized in that said polymer composition is applied in the molten state.

9. (Amended) A method according to claim 1, characterized in that said polymer composition P is a thermosetting composition and in that, after application, the polymer composition of the coating of the strip B is cured.

10. (Amended) A method according to claim 1, characterized in that said polymer composition P is a thermoplastics composition and in that said coated strip B is cooled after application and after the strip B has escaped from contact with said support roller (1”).

12. (Amended) A method according to claim 10, wherein the surface of said applicator roller (2”) is cooled directly.

13. (Amended) A method according to claim 1, characterized in that it further includes a step in which a polymer composition P” is applied to the internal face Bi of the strip.

PRELIMINARY AMENDMENT
Attorney Docket Q64043

18. (Amended) A device according to claim 16, characterized in that it includes additional means (6, 8) for post-heating the coated strip B on the feed path of the strip and downstream of said support roller (1”).

19. (Amended) A device according to claim 16, characterized in that said application means include an applicator roller (2”) with a deformable surface bearing indirectly on said support roller (1”) through the intermediary of said strip B so as to form rolling means in conjunction with said roller.

23. (Amended) A device according to claim 16, characterized in that said application means include means for extruding said composition P in the molten state.

24. (Amended) A device according to claim 16, characterized in that it includes means for cooling the strip on the feed path of the strip and downstream of said support roller (1”).

27. (Amended) A device according to claim 16 for coating the external face Be of a metal strip B, characterized in that it further includes means for coating the internal face Bi.


30. (Amended) A device according to claim 28, characterized in that it includes a pair of cooling rollers (4, 4”) downstream of said support roller (1”) and the successive rollers (4’, 4”) are disposed so that the coated faces Bi and Be of the strip come alternately into direct contact with the rollers (4, 4”).

PRELIMINARY AMENDMENT
Attorney Docket Q64043

REMARKS

Entry and consideration of this Amendment are respectfully requested.

Respectfully submitted,

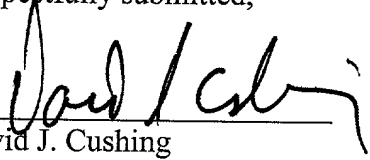

David J. Cushing
Registration No. 28,703

SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3213
Telephone: (202) 293-7060
Facsimile: (202) 293-7860

Date: April 12, 2001

106290 " 2BE/0260

APPENDIX

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE SPECIFICATION:

The specification is changed as follows:

Page 1, after the title, insert the heading

BACKGROUND OF THE INVENTION

Page 4, after line 12, insert the heading

SUMMARY OF THE INVENTION

Page 5, after line 36, insert the heading

BRIEF DESCRIPTION OF THE DRAWINGS

Page 6, after line 31, insert the heading

DETAILED DESCRIPTION OF THE INVENTION

IN THE CLAIMS:

The claims are amended as follows:

3. (Amended) A method according to ~~either claim 1 or claim 2~~, characterized in that said coated metal strip B is post-heated after it is fed over said support roller (1”).
4. (Amended) A method according to ~~any one of claims 1 to 3~~claim 1, characterized in that said polymer composition P is applied by rolling said composition between an applicator roller (2”) with a deformable surface and said strip B bearing on said support roller (1”).

PRELIMINARY AMENDMENT
Attorney Docket Q64043

5. (Amended) A method according to ~~any one of claims 1 to 4~~claim 1, characterized in that said polymer composition is applied in the solid state in the form of a film.

6. (Amended) A method according to ~~any one of claims 1 to 4~~claim 1, characterized in that said polymer composition is applied in the molten state.

9. (Amended) A method according to ~~any one of claims 1 to 8~~claim 1, characterized in that said polymer composition P is a thermosetting composition and in that, after application, the polymer composition of the coating of the strip B is cured.

10. (Amended) A method according to ~~any one of claims 1 to 8~~claim 1, characterized in that said polymer composition P is a thermoplastics composition and in that said coated strip B is cooled after application and after the strip B has escaped from contact with said support roller (1").

12. (Amended) A method according to claim 10 ~~or claim 11~~, wherein the surface of said applicator roller (2") is cooled directly.

13. (Amended) A method according to ~~any one of claims 1 to 12~~claim 1, characterized in that it further includes a step in which a polymer composition P" is applied to the internal face Bi of the strip.

18. (Amended) A device according to ~~either claim 16 or claim 17~~, characterized in that it includes additional means (6, 8) for post-heating the coated strip B on the feed path of the strip and downstream of said support roller (1").

19. (Amended) A device according to ~~any one of claims 16 to 18~~claim 16, characterized in that said application means include an applicator roller (2") with a deformable

PRELIMINARY AMENDMENT
Attorney Docket Q64043

surface bearing indirectly on said support roller (1'') through the intermediary of said strip B so as to form rolling means in conjunction with said roller.

23. (Amended) A device according to ~~any one of claims 16 to 22~~ claim 16, characterized in that said application means include means for extruding said composition P in the molten state.

24. (Amended) A device according to ~~any one of claims 16 to 23~~ claim 16, characterized in that it includes means for cooling the strip on the feed path of the strip and downstream of said support roller (1'').

27. (Amended) A device according to ~~any preceding claim~~ claim 16 for coating the external face Be of a metal strip B, characterized in that it further includes means for coating the internal face Bi.

30. (Amended) A device according to ~~either claim 28 or claim 29~~, characterized in that it includes a pair of cooling rollers (4, 4'') downstream of said support roller (1'') and the successive rollers (4', 4'') are disposed so that the coated faces Bi and Be of the strip come alternately into direct contact with the rollers (4, 4'').

6/PRTS

09/807387
JC03 Rec'd STA 12 APR 2001

1

METHOD AND DEVICE FOR CONTINUOUSLY COATING A METAL STRIP
WITH A POLYMER COMPOSITION

The invention relates to a method and a device for continuously coating a metal strip with a polymer composition.

A metal strip has two faces: the face to be coated is referred to hereinafter as the "external face" and the opposite face is referred to hereinafter as the "internal face".

A conventional coating device shown in Figure 1 includes:

- polymer composition application means, including a support roller 1 and means 3 for applying a layer of the composition to the external face Be of the strip, and
- means for feeding the strip continuously over the support roller 1 with its internal face Bi in contact with the surface of the roller.

The means for applying the polymer layer can extrude the polymer layer directly onto the strip, for example; the extrusion means then also form the layer; if this kind of application means is used, the polymer composition is free of solvent and the polymer is applied in the molten state.

The means for applying the polymer layer in the molten state can take the form of a device which includes two rollers bearing on each other and between which the strip to be coated is fed, as shown in Figures 2 and 3; in addition to the support roller 1 there is an applicator roller 2; during application, the external face Be of the strip and the coating come into the contact with the applicator roller 2.

As shown in Figure 2, the application means with two rollers 1 and 2 bearing on each other indirectly can be used to apply the polymer by a rolling process: the two rollers then revolve in opposite directions and the polymer composition P to be applied is introduced between the strip B and the applicator roller 2.

As shown in Figure 3, the above application means can also be used when a polymer layer N is formed on the applicator roller 2, for example with the aid of the means 3, and is then transferred from the applicator roller 2 to the strip B; the two rollers can then revolve in the same direction, as shown in Figure 3.

If a rolling process is used (Figure 2), the applicator roller 2 generally has a hard and non-deformable surface; the rollers are metal rollers, for example; this limits the risk of the polymer composition sticking to the rollers.

During and after application the polymer composition comes into direct contact only with the applicator roller, and this is therefore the only roller subject to the risk of sticking problems occurring: the risk is limited by choosing a hard surface and the hard surface is preferably cooled.

Before the polymer composition layer is applied to the strip to be coated, the strip is often pre-heated, in particular to improve the adhesion of the layer to the metal; this is particularly useful in the case of polymer compositions based on polyolefins, which are nonpolar and therefore adhere less readily to polar materials such as metals.

For the preheating step, if the support roller is provided with heating means, all that is required is to feed the strip over the heated support roller before applying the polymer layer, with the internal face of the strip held in contact with the hot surface of the roller: feeding the strip over the roller therefore pre-heats it to the temperature of the roller, during the duration of the feeding over this roller.

To limit the risk of sticking (see above), when the application means include a support roller 1 and an applicator roller 2 bearing indirectly on the support roller as previously described (Figure 2), the support roller 1 generally has a deformable surface, for example

a rubber surface, and the applicator roller 2 generally has a non-deformable surface, for example a metal surface.

When applying thermoplastics polymer compositions, it is sometimes necessary to obtain coatings with an amorphous or weakly crystalline structure; it is then important to carry out a quenching (fast cooling) operation after applying the layer to the strip; to be effective this quenching must be carried out as quickly as possible after application.

Referring to Figure 4, to be able to use the above-described device (the device shown in Figure 2, for example), and including a support roller with a deformable surface and an applicator roller with a non-deformable surface, the support roller 1' is heated and the applicator roller 2' is cooled; the strip to be coated is fed over the heated support roller 1', then between the rollers 1' and 2' to apply the polymer layer, and finally over the cooled applicator roller 2'; pre-heating therefore occurs during the movement from the point E to the point C on the heated support roller 1' and quenching therefore occurs during the movement from the point C to the point S on the cooled applicator roller 2'.

In the above method:

- the support roller 1' is heated and held in contact with the internal face Bi of the strip only before application,

- the polymer composition is applied to the external face Be of the strip in the molten state using conventional application means, and

- the applicator roller 2' is cooled and held in contact with the external face Be of the strip only after application.

In the above method, quenching begins immediately after application of the polymer layer; good adhesion of the metal strip is not obtained in this case because

cooling then occurs too quickly after application of the polymer layer.

For improved adhesion it is necessary to provide an intermediate coupling layer between the metal and the coating layer; this method proves to be very costly, however, since in reality the coatings are "two-layer" coatings, and generally necessitate two successive coating steps; despite the coupling layer, the adhesion on leaving the cold roller 2' is often still insufficient and the coated metal strip must be heated to increase the adhesion of the coating, which represents an even greater penalty from the economic point of view.

An object of the invention is to provide a method of obtaining adherent and amorphous or weakly crystalline coatings in a single coating step; another object of the invention is to provide a method that is much more economical.

To this end, the invention provides a method of continuously coating a metal strip with a polymer composition, said strip having an "external" face to be coated and an opposite "internal" face, characterized in that it includes the steps of:

- feeding said strip continuously over a heated support roller with a non-deformable metal surface,
- applying said polymer composition to the external face of the strip using application means including said support roller, and
- heating said strip before, during and after application through contact of its internal face with said support roller.

The main advantages of the invention are as follows:

- the heating of the strip is more efficient, more homogeneous and better controlled because the heated support roller has a metal surface, which contributes to improving the adhesion of the coating, and
- the adhesion of the coating is significantly improved because the strip remains in contact with the

heated support roller after application of the polymer coating to provide "post-heating" of the strip.

Other advantageous features of the method of the invention are defined in the dependent claims.

5 According to an additional feature of the invention, the polymer composition is applied by rolling between an applicator roller which has a deformable surface and a strip bearing on said support roller; the surface of the applicator roller is more deformable than that of the support roller and can therefore advantageously espouse asperities and roughness of the surface of the strip to be coated.

10 The invention also provides a device for implementing the method of the invention of coating a metal strip having an external face to be coated and an opposite internal face, said device including:

15 - means for applying a layer of polymer composition to the external face of the strip, including a support roller provided with heating means, and

20 - means for feeding the strip continuously and defining a feed path of the strip in said device, characterized in that:

- said support roller has a non-deformable metal surface, and

25 - said feed means feed the strip over said support roller with its internal face held in contact with the surface of said roller before, during and after application of said layer.

30 Other advantageous features of the device of the invention are defined in the dependent claims.

According to an additional feature of the invention, the device includes two successive coating stations, one for coating the external face, as previously described, and the other for coating the internal face.

35 The station for coating the internal face can have the same features as that for coating the external face.

The invention will be better understood on reading

09807387-062904

the following description, which is given by way of non-limiting example and with reference to the accompanying drawings, in which:

5 - Figures 1 to 4 shows prior art coating devices and methods: Figure 1 shows the general case of application to a strip moving over a support roller, Figures 2 to 4 show application to the strip by an applicator roller bearing on the support roller, and Figure 4 also shows fast cooling after application to obtain an amorphous or
10 partly crystalline coating;

15 - Figures 5 to 11 show various embodiments of the invention that differ in the mode of application of the polymer and/or in the treatment of the strip after passing over the support roller and/or in whether a single-face or two-face application process is used; of Figures 5 to 11:

20 - Figures 5, 6, and 7 show application by extrusion in contact with the strip bearing on the support roller and Figures 8 to 11 show application by rolling a molten film or layer between the support roller and an applicator roller;

25 - Figures 5, 6, 8, and 9 show cooling of the strip on at least one cooling roller after application to the first face and Figure 11 shows cooling of the strip on at least one cooling roller after application to the second face;

30 - Figure 9 shows one particular method of cooling the surface of the applicator roller using a flexible metal skirt J which is itself cooled; and

 - Figures 10 and 11 show a two-face application process.

35 Referring to Figure 5, the device for implementing the method of the invention of coating a metal strip B having an "external" face Be to be coated and an opposite "internal" face Bi includes:

 - means for applying a polymer composition including:

09807387-062901
T06290-28270660

- a support roller 1' with a non-deformable metal surface and provided with heating means, and

- means 3 for applying a layer of the composition in the molten state to the external face Be of the strip; and

- means for feeding the strip continuously, including:

- the support roller 1", and

- a cooling roller 4 provided with cooling means.

The means 3 apply a polymer layer in the molten state, are known in the art and are not described in detail herein, and include extrusion means and/or rolling means and/or polymer layer transfer means, for example.

To implement the method of the invention, the strip B is fed over the heated support roller 1" and then over the cooled roller 4. While it is being fed over the roller 1", a layer of polymer composition is applied to the strip at C by application means 3.

As it is fed, the strip comes into contact with the support roller 1" along the line E and escapes from contact with the roller along the line P; the line P is on the circumference of the roller a considerable distance downstream of the line C in the rotation or feed direction.

During execution of the method the strip is therefore pre-heated on the roller 1" between the lines E and C, then coated in the area C, then immediately "post-heated" on the same roller between the lines C and P, and finally cooled by passing it over the cooling roller 4 between the lines R and G.

In the configuration shown in Figure 5, the polymer layer applied to the face Be of the strip comes into direct contact with the surface of the roller 4; this can have drawbacks, for example the risk of damaging the coating of the strip.

Another configuration can be used to avoid this

5 In Figure 6, means 5 are provided for spraying the coated face Be of the strip between the support roller 1" and the cooling roller 4'; these cooling means make the cooling more effective.

The post-heating conditions are defined by the temperature of the roller 1" and the feed distance between the lines C and P.

20 By means of the device and the method of the invention, a post-heating operation can be carried out very economically just after applying the polymer layer, by holding the coated strip in contact with the support roller 1"; this improves the adhesion of the layer to the strip.

In a variant of the invention, and depending on the nature of the polymer composition to be deposited and the speed at which the metal strip is fed, the strip has already undergone a first stage of pre-heating before it is fed over the support roller 1"; the device for executing the method of the invention then includes additional pre-heating means on the upstream side of the application means; conventional pre-heating means are used, for example induction heating means or infrared

radiant heating means.

In another variant of the invention, and depending on the nature of the polymer composition and the required microstructure of the intended coating, the coated metal strip is reheated after it has been fed over the support roller 1"; the device for executing the method of the invention then includes additional post-heating means downstream of the application means, for example replacing the cooling means 5 shown in Figure 6.

Conversely, when it is necessary to cool the coated strip by quenching it immediately after post-heating on the support roller, the cooling roller 4 is located as close as possible to the support roller 1", to the point where the distance PR is zero or virtually zero (Figure 5 variant).

Referring to Figure 7, when a thermosetting polymer composition is used, the roller 4 is advantageously replaced by a heating device 6 for curing the polymer.

If a thermoplastics polymer composition is used and a coating that has a strongly amorphous structure is required, the main cooling means such as the rollers 4 or 4' or the additional cooling means such as the spraying means 5 are adapted in a manner that is known in the art to obtain fast quenching to form a coating having a strongly amorphous structure.

By means of the invention, there is then obtained, in a highly economical manner, a coating which is both strongly amorphous, because of the quenching, and strongly adherent, because of the post-heating, and this is achieved under conditions that are easy to control.

In the case where the polymer composition layer is applied between two rollers between which the strip is fed, and in particular when the layer is applied by rolling (polymer film or layer) or by transfer (polymer layer), an applicator roller with a deformable surface and bearing on the support roller is used in addition to the support roller with its non-deformable metal surface.

In accordance with the invention, because the support roller has a non-deformable surface, it is possible to use an applicator roller with a deformable surface; using an applicator roller with a deformable surface enables the polymer coating to be applied to the metal strip in a highly homogeneous manner, ensures a highly homogeneous contact between the coating and the strip at all points of the strip, regardless of asperities and roughness, and prevents air bubbles from being trapped between the strip and the coating.

The expression "deformable surface" means a surface that can deform so as to espouse the roughness of the strip when the applicator roller is bearing on the support roller; examples of rollers with a deformable surface include rollers with a deformable rubber surface.

Thus whether the rolling process or the transfer process is used, important differences compared to the prior art are that the applicator roller has a deformable surface and that, after application of the polymer to the strip, the strip is not held with its coated external face in contact with the roller, but is instead held with its internal face in contact with the support roller; this feature of the movement of the strip after application of the polymer limits the risk of the coating sticking to the applicator roller; to limit further the risk of sticking, it is necessary to cool the surface of the applicator roller appropriately.

Figures 8 to 11 show variants of the method and the device for application between rollers.

Figure 8 is similar to Figure 5, except that the polymer composition P is applied by rolling a molten polymer film or layer between the applicator roller 2" and the support roller 1".

As previously indicated, the device preferably includes means for cooling the applicator roller to limit the risk of the polymer composition sticking to the applicator roller 2".

Because the surface of the applicator roller is required to be deformable, the surface of the roller is generally made from a material that is a poor conductor of heat, and it is advantageous to cool the surface of the roller directly: Figure 9 shows one means of directly cooling the surface of the roller.

Figure 9 is similar to Figure 8 except that a flexible metal cooling skirt J is also fed around the applicator roller 2". The skirt J is cooled by contact with a skirt-cooling roller 7.

The advantage of this variant is that the surface of the applicator roller 2" is cooled very effectively.

It is nevertheless necessary to limit the cooling of the applicator roller 2", to retain sufficient elasticity of its deformable surface.

Figure 10 shows a device of the invention for two-layer coating; a first layer of polymer P is applied to the first face of the strip B in exactly the same way as in Figure 8, with a cooling roller 4 very close to the support roller 1" so that the coating is quenched immediately; after quenching, the strip coated on one face is then diverted by a deflector roller 10 to offer up its other face for coating with a polymer P" between two rollers 1 and 2, in a manner similar to that shown in Figure 2; the surface and the temperature of the roller 1 are matched to the polymer P" that comes into contact with the roller; the roller 2 has a deformable surface; on escaping from the grip of the rollers 1 and 2, the strip coated on both faces is then fed into conventional post-heating means 8, after which it is quenched in the conventional way; the conditions of post-heating in the means 8 and the conditions of quenching are chosen to obtain the required coating structure.

The device shown in Figure 10 therefore includes:

- a first station for coating between the rollers 1" and 2", in which the roller 1" provides pre-heating and post-heating of the strip, and

- a second station for coating between the rollers 1 and 2, in which the roller 1 does not apply post-heating of the strip, even though it has a hard surface and is used for pre-heating the strip, because the coated strip does not remain in contact with this roller beyond the line of application of the coating on escaping from the grip of the rollers 1 and 2.

The device shown in Figure 11 also includes two stations for coating between two rollers 1'', 1''' and 2'', 2''' to obtain a strip coated with polymer on each face; at each station, the support roller 1'', 1''' has a hard metal surface and the strip is laced around the roller both before and after the line of application of the polymer P, P'' that corresponds to the line of grip between the rollers; in each station, the applicator roller 2'', 2''' has a deformable surface; to prevent the risk of the polymer P sticking to the support roller 1''' in the second station, the support roller 1''' is coated with a thin non-stick layer 9, for example a layer based on PTFE.

The non-stick layer can be of metal, for example with an amorphous or quasi-crystalline structure of the type obtained by hyper-quenching.

Unlike the Figure 10 situation, after the first coating station, the strip coated on one face is fed directly to the second station to coat the other face: there is no cooling roller and no deflector roller between the two stations.

The coating previously applied to the first face of the strip remains in contact with the roller 1''' with its non-stick layer 9 before, during and after application of the polymer P'' to the second face; as previously, the nature of the surface and the temperature of the support roller 1'' are chosen accordingly; the contact of the strip with the roller 1''' after application can be extended over one-quarter of the circumference of the roller, as shown, or even as far as one-half of the

circumference, so as to prolong the transfer of heat to provide the required post-heating.

5 If the transfer of heat is slowed by an organic non-stick layer 9 and/or by the first coating, a roller 1" of larger diameter can be used to increase the time of contact between the strip and the roller and prolong the transfer of heat.

10 Both faces of the coated strip are then quenched by passing the strip over two successive cooling rollers 4, 4" which are disposed so that the two coated faces come alternately into direct contact with the two rollers in succession; quenching begins as soon as the strip loses contact with the support roller 1" of the second station.

15 Other conventional quenching methods can be substituted for quenching by rollers, such as water quenching.

20 Without departing from the scope of the invention, all variants and improvements previously described in the case of a single-face coating process can be applied at the second station.

A strip coated with polymer on both faces is then obtained.

25 The device and the method of the invention have been used with advantage to prepare steel strips coated with polyethylene or polypropylene films for use in the fabrication of packaging.

30 The coatings have the following advantages: absence of solvent during fabrication steps, good surface appearance and good capacity for printing the coated faces of the plate, and improved organoleptic qualities.

35 Using the method of the invention, it is possible to obtain coatings that are very adherent to the plate in a dry or moist atmosphere, even after sterilization, and sufficiently amorphous to be readily deformable, in particular for there to be no risk of porosity appearing after pressing.

09807387-062901

CLAIMS

1. A method of continuously coating a metal strip B with a polymer composition P, said strip having an "external" face Be to be coated and an opposite "internal" face Bi, characterized in that it includes the steps of:
- feeding said strip B continuously over a heated support roller (1") with a non-deformable metal surface,
 - applying said polymer composition P to the external face Be of the strip using application means including said support roller (1"), and
 - heating said strip B before, during and after application through contact of its internal face Bi with said support roller (1").
2. A method according to claim 1, characterized in that said metal strip B is pre-heated before it is fed over said support roller (1").
3. A method according to either claim 1 or claim 2, characterized in that said coated metal strip B is post-heated after it is fed over said support roller (1").
4. A method according to any one of claims 1 to 3, characterized in that said polymer composition P is applied by rolling said composition between an applicator roller (2") with a deformable surface and said strip B bearing on said support roller (1").
5. A method according to any one of claims 1 to 4, characterized in that said polymer composition is applied in the solid state in the form of a film.
6. A method according to any one of claims 1 to 4, characterized in that said polymer composition is applied in the molten state.

7. A method according to claim 6, characterized in that said polymer composition is applied in the molten state by direct extrusion onto said strip bearing on said support roller (1").

5 8. A method according to claim 6, characterized in that the application of said polymer composition in the molten state includes the steps of:

- 10 - applying a layer of said composition P to an applicator roller (2") which has a deformable surface, and
- transferring said layer from said applicator roller (2") to said strip bearing on said support roller (1").

15 9. A method according to any one of claims 1 to 8, characterized in that said polymer composition P is a thermosetting composition and in that, after application, the polymer composition of the coating of the strip B is cured.

20 10. A method according to any one of claims 1 to 8, characterized in that said polymer composition P is a thermoplastics composition and in that said coated strip B is cooled after application and after the strip B has escaped from contact with said support roller (1").

25 11. A method according to claim 10, characterized in that cooling by quenching is carried out to obtain a polymer coating layer having an amorphous or partly crystalline structure.

30 12. A method according to claim 10 or claim 11, wherein the surface of said applicator roller (2") is cooled directly.

13. A method according to any one of claims 1 to 12,

characterized in that it further includes a step in which a polymer composition P'' is applied to the internal face Bi of the strip.

14. A method according to claim 13, characterized in that, for the step in which a polymer composition is applied to the internal face Bi of the strip, said strip already coated on its external face Be is fed over a heated metal support roller (1'') which has a non-deformable surface so that the strip is heated by contact of its external face Be with said support roller (1'') before, during and after application of the polymer composition P'' to the internal face Bi of the strip.

15. A method according to claim 14, characterized in that said support roller (1'') is provided with a non-stick layer (9).

16. A device for implementing the method according to any preceding claim of coating a metal strip B having an "external" face Be to be coated and an opposite "internal" face Bi, said device including:

- means for applying a layer of polymer composition P to the external face of the strip, including a support roller (1'') provided with heating means, and

- means for feeding the strip continuously and defining a feed path of the strip in said device, characterized in that:

- said support roller (1'') has a non-deformable metal surface, and

- said feed means feed the strip over said support roller (1'') with its internal face Bi held in contact with the surface of said roller before, during and after application of said layer.

17. A device according to claim 16, characterized in that it includes additional means for pre-heating the

strip B to be coated on the feed path of the strip and upstream of said support roller (1").

18. A device according to either claim 16 or claim 17, characterized in that it includes additional means (6, 8) for post-heating the coated strip B on the feed path of the strip and downstream of said support roller (1").

19. A device according to any one of claims 16 to 18, characterized in that said application means include an applicator roller (2") with a deformable surface bearing indirectly on said support roller (1") through the intermediary of said strip B so as to form rolling means in conjunction with said roller.

20. A device according to claim 19, characterized in that said applicator roller (2") is provided with cooling means.

21. A device according to claim 20, characterized in that said cooling means cool the surface of said applicator roller (2") directly.

22. A device according to claim 21, characterized in that said cooling means include a metal skirt J fed in contact with said applicator roller (2") to cool it and means for cooling said metal skirt J.

23. A device according to any one of claims 16 to 22, characterized in that said application means include means for extruding said composition P in the molten state.

24. A device according to any one of claims 16 to 23, characterized in that it includes means for cooling the strip on the feed path of the strip and downstream of said support roller (1").

25. A device according to claim 24, characterized in that the cooling means include a cooling roller (4, 4', 4'') with a metal surface.

5 26. A device according to claim 24, characterized in that the cooling means include water spraying and/or water quenching means.

10 27. A device according to any preceding claim for coating the external face Be of a metal strip B, characterized in that it further includes means for coating the internal face Bi.

28. A device according to claim 27, characterized in that the means for coating the internal face Bi are on the feed path of the strip and downstream of said support roller (1'') and include:

15 - means for applying a layer of polymer composition P'' to the internal face of the strip, including a metal support roller (1''') with a non-deformable surface and provided with heating means, and

20 - means for feeding the strip over said support roller (1''') with its already coated external face Be held in contact with the surface of said roller before, during and after application of said layer.

25 29. A device according to claim 28, characterized in that said support roller (1''') is provided with a non-stick layer (9).

30 30. A device according to either claim 28 or claim 29, characterized in that it includes a pair of cooling rollers (4, 4'') downstream of said support roller (1''') and the successive rollers (4', 4'') are disposed so that the coated faces Bi and Be of the strip come alternately into direct contact with the rollers (4, 4'').

006290" 28E 20360

A B S T R A C T

5 A method that includes the steps of: feeding the
strip continuously over a heated support roller (1") with
a non-deformable metal surface, applying the polymer
composition P to one face Be of the strip bearing on that
roller; and heating the strip before, during and after
10 application through contact of the other face Bi with
that roller (1"). An associated device for single-face
or two-face coating. In the case of application between
two rollers, the other roller (2") has a deformable
surface. Advantage: improved adhesion of the coating.

15

20

25

30

35

Translation of the title and the abstract as published by the PCT Authorities,
possibly after making changes, ex officio, e.g. under PCT Rules 37.2, 38.2, and/or
48.3.

Fig. 1

Fig. 2

Fig. 3

The diagram illustrates a two-roll mill system. Two horizontal rollers, labeled 1'' and 4, are shown. Roller 1'' is the top roller and roller 4 is the bottom roller. Both rollers have a central 'x' and a curved arrow indicating a clockwise rotation. A material, represented by a wavy line, is fed from the left between the rollers. It passes between the rollers, then wraps around the bottom roller 4 at point G, and finally exits to the right at point B. A label 'Be' with an arrow points to the material as it exits. A label '3' points to the initial feed of the material. Other labels include 'C' at the point where the material enters the gap between the rollers, 'P' at the point where the material leaves the gap, and 'R' at the point where the material wraps around the bottom roller. A label 'F' is located at the bottom right of the diagram.

Fig. 6

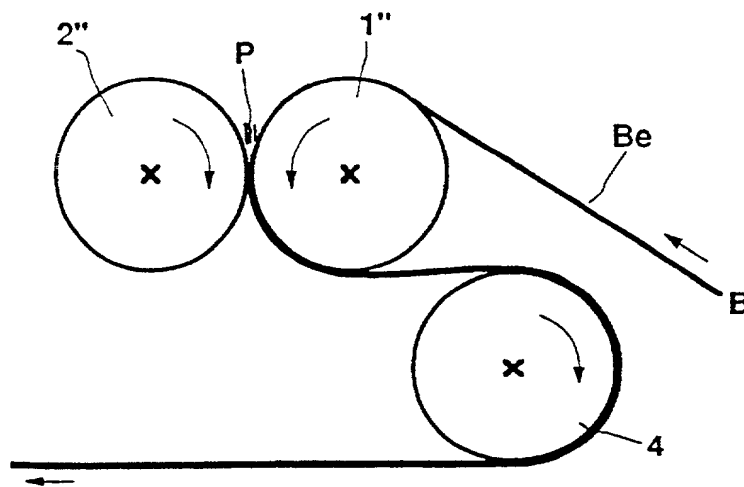


Fig. 8

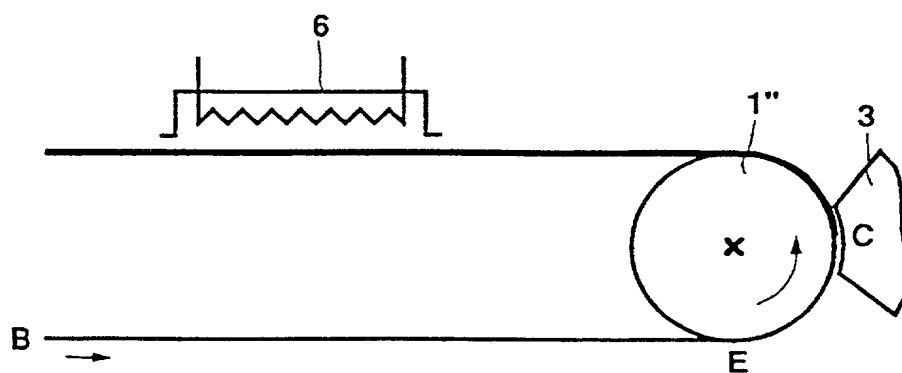


Fig. 7

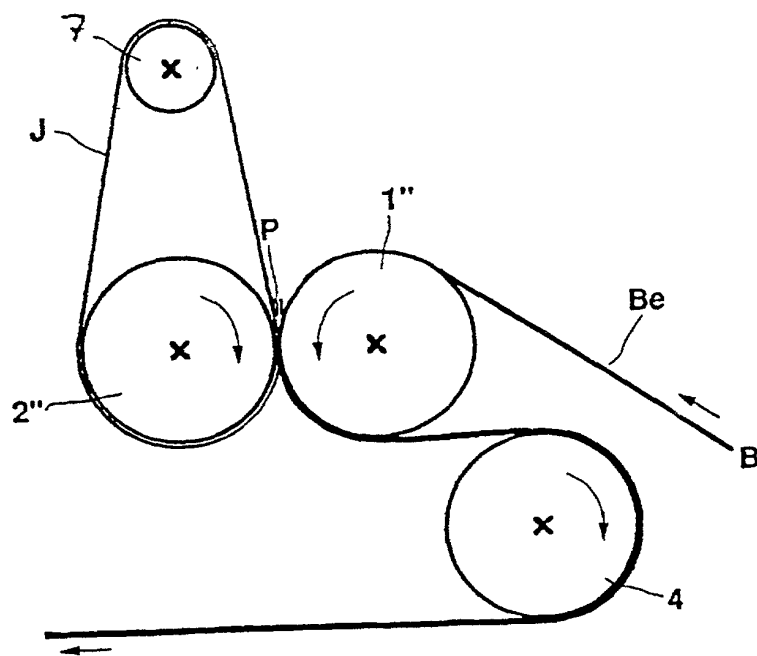


Fig.9

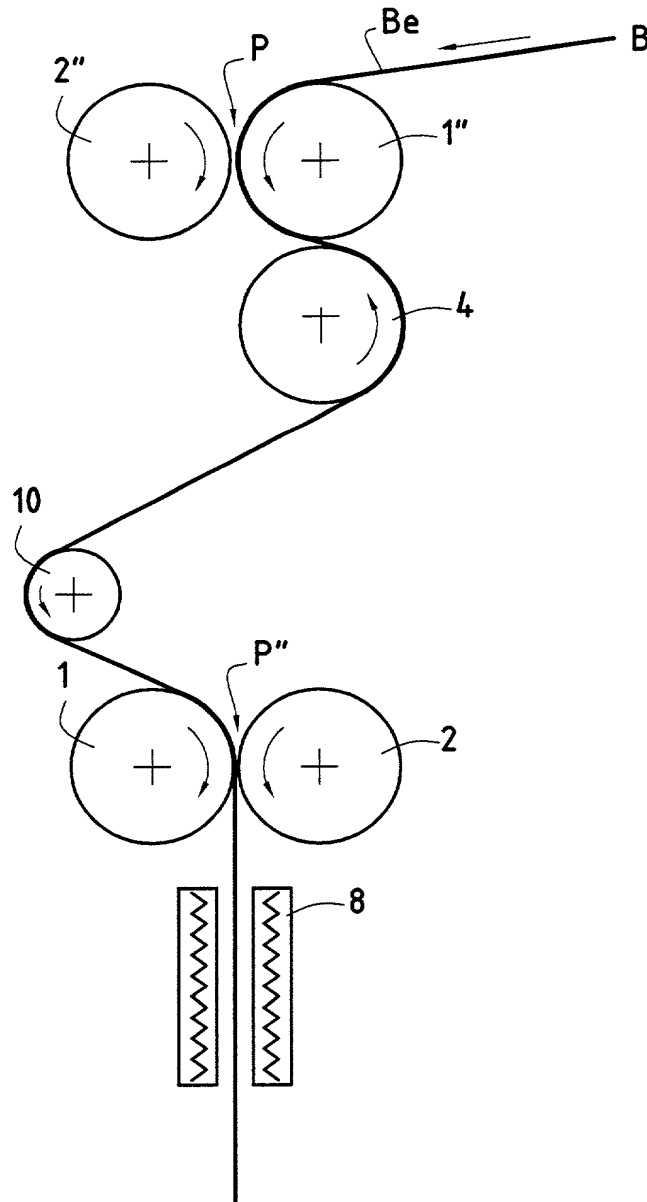


Fig.10

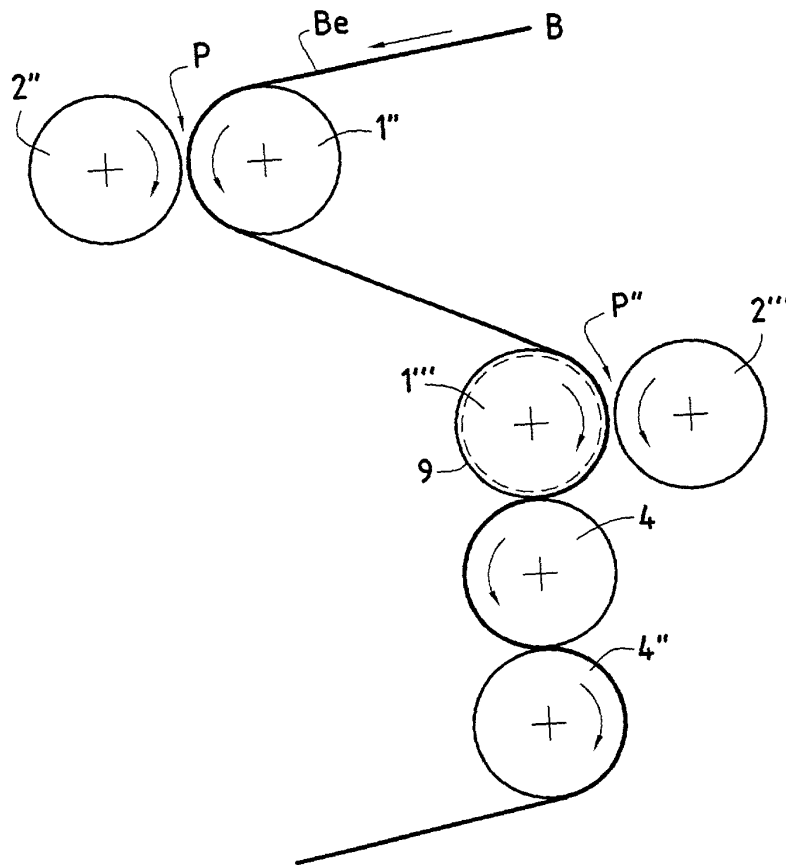


Fig.11

Declaration and Power of Attorney for Patent Application

Déclaration et Pouvoirs pour Demande de Brevet

French Language Declaration

En tant que l'inventeur nommé ci-après, je déclare par le présent acte que:

Mon domicile, mon adresse postale et ma nationalité sont ceux figurant ci-dessous à côté de mon nom.

Je crois être le premier inventeur original et unique (si un seul nom est mentionné ci-dessous), ou l'un des premiers co-inventeurs originaux (si plusieurs noms sont mentionnés ci-dessous) de l'objet revendiqué, pour lequel une demande de brevet a été déposée concernant l'invention intitulée

et dont la description est fournie ci-joint à moins que la case suivante n'ait été cochée:

☐ a été déposée le _____
sous le numéro de demande des Etats-Unis ou le numéro
de demande international PCT
_____ et modifiée le
_____ (le cas échéant).

Je déclare par le présent acte avoir passé en revue et compris le contenu de la description ci-dessus, revendications comprises, telles que modifiées par toute modification dont il aura été fait référence ci-dessus.

Je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du Code fédéral des réglementations.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Method and device for continuously
coating a metal strip with a polymer
composition

the specification of which is attached hereto unless the following box is checked:

☒ was filed on October 6, 1999
as United States Application Number or PCT
International Application Number
PCT/FR99/02382 and was amended on
_____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

French Language Declaration

Je revendique par le présent acte avoir la priorité étrangère, en vertu du Titre 35, § 119(a)-(d) ou § 365(b) du Code des Etats-Unis, sur toute demande étrangère de brevet ou certificat d'inventeur ou, en vertu du Titre 35, § 365(a) du même Code, sur toute demande internationale PCT désignant au moins un pays autre que les Etats-Unis et figurant ci-dessous et, en cochant la case, j'ai aussi indiqué ci-dessous toute demande étrangère de brevet, tout certificat d'inventeur ou toute demande internationale PCT ayant une date de dépôt précédant celle de la demande à propos de laquelle une priorité est revendiquée.

Prior foreign application(s)
Demande(s) de brevet antérieure(s)

(Number)	(Country)
(Numéro)	(Pays)
98 12866	France

Je revendique par le présent acte tout bénéfice, en vertu du Titre 35, § 119(e) du Code des Etats-Unis, de toute demande de brevet provisoire effectuée aux Etats-Unis et figurant ci-dessous.

(Application No.)	(Filing Date)
(N° de demande)	(Date de dépôt)

(Application No.)	(Filing Date)
(N° de demande)	(Date de dépôt)

Je revendique par le présent acte tout bénéfice, en vertu du Titre 35, § 120 du Code des Etats-Unis, de toute demande de brevet effectuée aux Etats-Unis, ou en vertu du Titre 35, § 365(c) du même Code, de toute demande internationale PCT désignant les Etats-Unis et figurant ci-dessous et, dans la mesure où l'objet de chacune des revendications de cette demande de brevet n'est pas divulgué dans la demande antérieure américaine ou internationale PCT, en vertu des dispositions du premier paragraphe du Titre 35, § 112 du Code des Etats-Unis, je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du Code fédéral des réglementations, dont j'ai pu disposer entre la date de dépôt de la demande antérieure et la date de dépôt de la demande nationale ou internationale PCT de la présente demande:

(Application No.)	(Filing Date)
(N° de demande)	(Date de dépôt)

(Application No.)	(Filing Date)
(N° de demande)	(Date de dépôt)

Je déclare par le présent acte que toute déclaration ci-incluse est, à ma connaissance, véridique et que toute déclaration formulée à partir de renseignements ou de suppositions est tenue pour véridique; et de plus, que toutes ces déclarations ont été formulées en sachant que toute fausse déclaration volontaire ou son équivalent est passible d'une amende ou d'une incarcération, ou des deux, en vertu de la Section 1001 du Titre 18 du Code des Etats-Unis, et que de telles déclarations volontairement fausses risquent de compromettre la validité de la demande de brevet ou du brevet délivré à partir de celle-ci.

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below, and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed
Droit de priorité non revendiqué

(Day/Month/Year Filed)	_____
(Jour/Mois/Année de dépôt)	_____
14/10/1998	_____
(Day/Month/Year Filed)	_____
(Jour/Mois/Année de dépôt)	_____

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status)(patented, pending, abandoned)	_____
(Statut)(breveté, en cours d'examen, abandonné)	_____

(Status)(patented, pending, abandoned)	_____
(Statut)(breveté, en cours d'examen, abandonné)	_____

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

French Language Declaration

POUVOIRS: En tant que l'inventeur cité, je désigne par la présente l'(les) avocat(s) et/ou agent(s) suivant(s) pour qu'ils poursuive(nt) la procédure de cette demande de brevet et traite(nt) toute affaire s'y rapportant avec l'Office des brevets et des marques: (mentionner le nom et le numéro d'enregistrement).

John H. Mion, Reg. No. 18,879; Donald B. Zinn, Reg. No. 19,046; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olney, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Robert G. Mc Morrow, Reg. No. 19,093; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burdick, Reg. No. 31,333; Gordon K. Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Scott M. Daniels, Reg. No. 32,562; Brian W. Hanson, Reg. No. 32,778; Abraham J. Rosner, Reg. No. 33,276; Bruce E. Kramer, Reg. No. 33,725; Paul F. Neils, Reg. No. 33,102; and Brett S. Sylvester, Reg. No. 32,765.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

Adresser toute correspondance à:

Send Correspondence to:

SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue, N.W., Suite 800
Washington, D.C. 20037-3202



Adresser tout appel téléphonique à:
(nom et numéro de téléphone)

Direct Telephone Calls to:
(name and telephone number)

Nom complet de l'unique ou premier inventeur	Full name of sole or first inventor <u>DUBARRE Francois</u>
Signature de l'inventeur	Inventor's signature <u>FDub</u> Date <u>May 30, 2001</u>
Domicile	Residence <u>ANCY SUR MOSELLE, France FRX</u>
Nationalité	Citizenship <u>France</u>
Adresse postale	Post Office Address <u>51 Rue B.Toussaint</u> <u>57130 Ancy sur Moselle, France</u>
Nom complet du second co-inventeur, le cas échéant	Full name of second joint inventor, if any <u>VEUTIN Gérard</u>
Signature du second inventeur	Second inventor's signature <u>Veutin</u> Date <u>May 30, 2001</u>
Domicile	Residence <u>THIONVILLE, France FRX</u>
Nationalité	Citizenship <u>France</u>
Adresse postale	Post Office Address <u>50 Rue Paul Albert</u> <u>57100 THIONVILLE, France</u>

(Fournir les mêmes renseignements et la signature de tout co-inventeur supplémentaire.)

(Supply similar information and signature for third and subsequent joint inventors.)

Nom complet du troisième co-inventeur, le cas échéant		Full name of third joint inventor, if any 3-05 SOIRFECK Eugène	
Signature du troisième l'inventeur	Date	Third inventor's signature 	Date May 30, 2001
Domicile	Residence HAYANGE, France 		
Nationalité	Citizenship France		
Adresse postale	Post Office Address 5 Rue de la Côte 57700 HAYANGE, France		
Nom complet du quatrième co-inventeur, le cas échéant		Full name of fourth joint inventor, if any	
Signature du quatrième l'inventeur	Date	Fourth inventor's signature	Date
Domicile	Residence		
Nationalité	Citizenship		
Adresse postale	Post Office Address		
Nom complet du cinquième co-inventeur, le cas échéant		Full name of fifth joint inventor, if any	
Signature du cinquième l'inventeur	Date	Fifth inventor's signature	Date
Domicile	Residence		
Nationalité	Citizenship		
Adresse postale	Post Office Address		
Nom complet du sixième co-inventeur, le cas échéant		Full name of sixth joint inventor, if any	
Signature du sixième l'inventeur	Date	Sixth inventor's signature	Date
Domicile	Residence		
Nationalité	Citizenship		
Adresse postale	Post Office Address		